

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number
WO 2005/061183 A3

(51) International Patent Classification⁷:
B21D 37/02, B23Q 7/04, 5/40

B25B 1/24,

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/GB2004/005429

(22) International Filing Date:

23 December 2004 (23.12.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0329983.1 24 December 2003 (24.12.2003) GB

(71) Applicant (for all designated States except US): **SURFACE GENERATION LTD** [GB/GB]; 1B Centurian Business Park, Sturrock Way, Bretton, Peterborough PE3 8YF (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HALFORD, Ben, John** [GB/GB]; 7 Redland Close, Barrowden, Rutland, Leicestershire LE15 8ES (GB).

(74) Agents: **STAGG, Diana, C. et al.**; Marks & Clerk, 144 New Walk, Leicester LE1 7JA (GB).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

[Continued on next page]

(54) Title: **IMPROVED TOOLING SYSTEM**

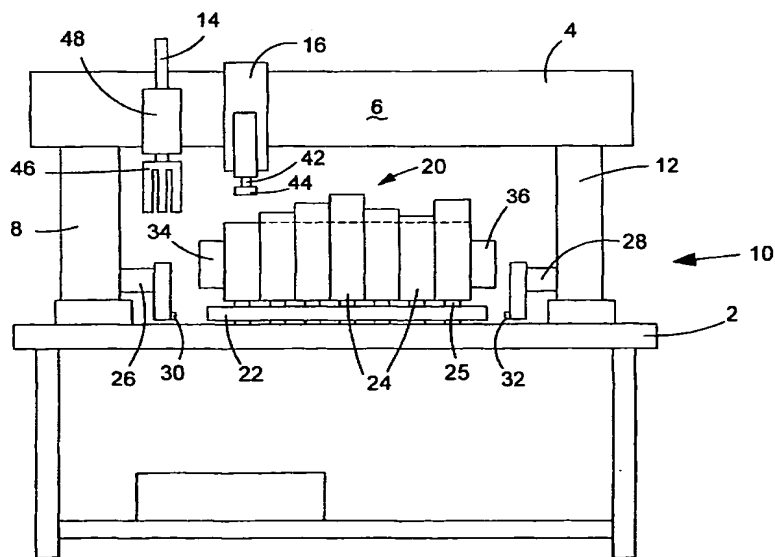

(57) Abstract: A tooling system comprises a plurality of elements (24) arranged in an array, each element being supported on a cross rail (22) and being moveable relative to the other elements in the array. Each element terminates in a threaded support post (25) extending from a first end of the element, and is associated with a corresponding internally threaded aperture in the cross rail upon which the element is supported. The tooling system further comprises an adjusting component in the form of a fork (46) which is driveable in rotation and engageable with an element of the array to drive the element in rotation, upon rotation of the fork.

WO 2005/061183 A3



(88) Date of publication of the international search report:
27 October 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.